



e-Keypad

The e-Keypad is an elegant solution to access restriction. Ideal for access systems requiring a large number of codes. With advanced settings available for installers/supervisors,



Power, Physical and Environment

| | |
|---------------------------------|---------------------|
| Voltage: | 3V DC |
| Current draw standby: | 200 nA |
| Peak current draw: | 10 m/a |
| Battery Type: | CR2450 |
| Battery Type: | 540 m/a |
| Frequency: | 433.39 mHz |
| User Code Storage: | 200 Codes |
| Supervisor Code Storage: | 1 Code |
| Channels: | 3 Channels |
| Size: | 135mm x 90mm x 20mm |
| Pin Code Length: | 4-8 Digits |
| Encryption: | AES 128-Bit |

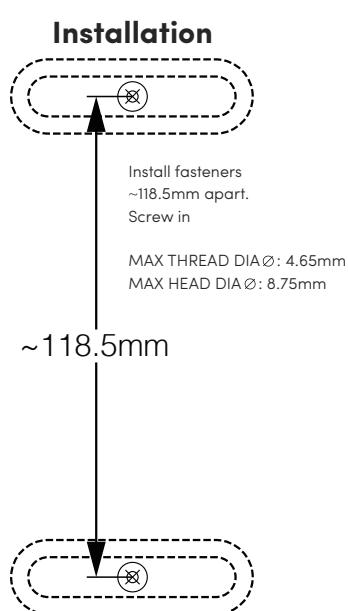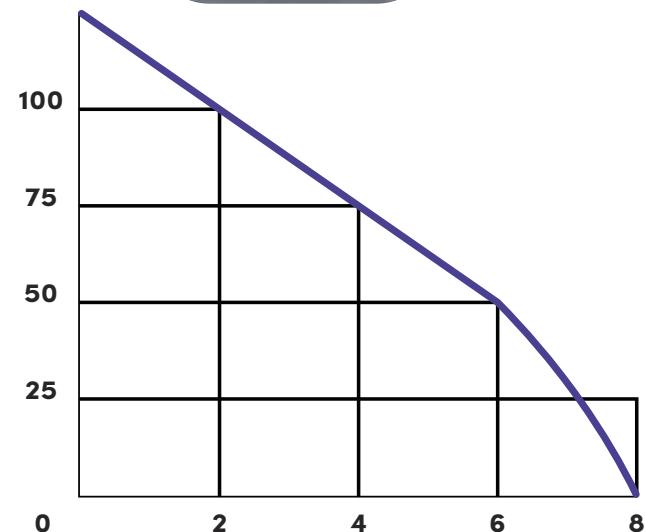

Compliance

| | |
|---------------|---|
| Safety | Tested to CE Approval |
| EMC | <p>Tested to:</p> <p>EN 301 489-1 V2.2.3 "ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility"</p> <p>Including</p> <p>a)_Emissions to EN 55032 "Electromagnetic compatibility of multimedia equipment".</p> <p>b)_Transmitter and receiver test to EN 300 220-1 V3.1.1 'Short Range Devices (SRD) operating in the frequency range 25MHz. to 1000MHz; Part 1: Technical Characteristics and methods of measurement."</p> <p>c)_Immunity Tests to EN 301 489-1</p> |